

**Diesel Generating Set TNXS - 28**

50Hz

**General Features**

- **Engine** 4DW92-35D FAWDE Made in china
- **Alternator** WHI184F Wattek Made in China
- **Controller** HGM6110U Smartgen Made in CHINA

Prime power	20kW/25kVA
Standby power	22kW/27.5kVA



- Electronic speed control
- 24V starting batteries, maintenance-free type, connecting cables
- Equipped with CHINT MCCB; ABB in Option
- Equipped with industrial silencer and flexible exhaust hose
- Radiator 40°C max, fans are driven by belt with safety guard

- 24V charge dynamo
- Equipped with 8-hours operation base tank
- Design comply to ISO8528/GB2820
- Absorber (anti instant braking)
- User manual, Packing list

**General Ratings**

Voltage	Power				Frequency (Hz)	Phase	P.F (COSφ)	Prime Current (A)
	Prime kw	Prime kva	Standby kw	Standby kva				
240/415V	20.0	25.0	22.0	27.5	50	3	0.8	34.8
230/400V	20.0	25.0	22.0	27.5	50	3	0.8	36.1
220/380V	20.0	25.0	22.0	27.5	50	3	0.8	38.0

**Prime power**

This rating is for the supply of continuous electrical power at variable load. A 10% overload capability is available for a period of 1 hour within each 12-hour period of operation.

**Standby power**

This rating is for the supply of continuous electrical power at variable load in the event of utility power failure. No overload is permitted.

**Rated voltage**

Available with customers requirements.

**Sales Promise**

TANON POWER provides a full line of 100% brand new and high quality products.

Each and every unit is strictly factory tested before delivery.


Warranty is according to below standard conditions, subject to the earlier one.

1. 15 months, counted on the day TANON sold to the first buyer.
2. One year after installation.
3. 1500 running hours.


Service and parts are available from TANON or distributors in your location.

**Dimension And Weight**

**Open frame**  
Size(L×W×H):1600×800×1050(mm)  
N.W.:600 (kgs)

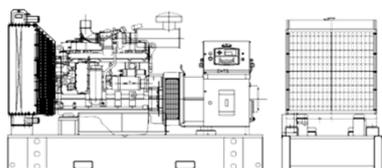

**Silent with Canopy**  
Size(L×W×H)::2000×850×1150(mm)  
N.W.:850 (kgs)

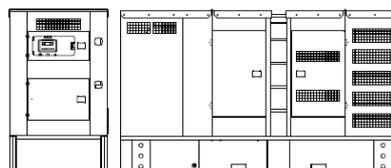

## Diesel Generating Set TNXS - 28

**50Hz**

### Engine Specifications

1	Engine model	4DW92-35D
2	Engine manufacturer	FAWDE
3	Number of cylinders	4
4	Cylinder arrangement	Vertical in line
5	Cycle	4 stroke
6	Aspiration	Turbo
7	Bore×Stroke(mm×mm)	90x 100
8	Displacement (Liter)	2.545
9	Compression Ratio	17:1
10	Prime power/speed (kW/RPM)	26/1500RPM
11	Standby power/speed (kW/RPM)	28.6/1500RPM
12	Speed governor	electronic
13	Cooling system	Water-cooled
14	Coolant capacity (engine only) (L)	12
15	Steady speed droop (%)	≤5%
16	Total lubrication system capacity (L)	7.8
17	Oil consumption (% of fuel)	<0.15%
18	Fuel consumption at 100% load (L/H)	6.2
19	Fuel consumption at 75% load (L/H)	4.9
20	Fuel consumption at 50% load (L/H)	3.7
21	Starter motor	24V
22	Dynamo	24V

### Alternator Specifications

Compliance with GB755,BS5000,VDE0530,NEMAMG1-22,IED34-1,CSA22.2 and AS1359

1	Alternator model	WHI184F
2	Alternator manufacturer	Wattek
3	Exciter type	Single bearing, Brushless, Self-excited
4	Rated output prime power	27.5KVA
5	Rated speed	1500 RPM
6	Rated frequency	50 Hz
7	Phase	3
8	Rated voltage	400V
9	Power factor	0.8
10	Voltage adjust range	≥5%
11	Voltage regulation NL-FL	≤±1%
12	Insulation grade	H
13	Protection grade	IP22

**Alternator option**

Mecc Alte, Stamford, Leroy Somer

### Main Electrical Performance Data

Voltage				Frequency			
Stable Regulation rate	Fluctuation	Recover time	Instantaneous Regulating rate	Stable regulation rate	Instantaneous regulating rate	Recover time	Fluctua-tion
+/-2.5%	0.5%	1.5s	+20%/-15%	+5%	+/-10%	5S	0.5%

**Diesel Generating Set TNXS - 28**

50Hz

**Control System**

Deepsea (UK)	Model	HGM6110U
<b>Protection</b>	<b>Parameter</b>	<b>PHOTO</b>
<ul style="list-style-type: none"> <li>● Low oil pressure</li> <li>● High water temp</li> <li>● Over speed</li> <li>● over crank</li> <li>● Over load</li> <li>● Over/low volt</li> <li>● Over/low frequency</li> <li>● Battery charge failure</li> </ul>	<ul style="list-style-type: none"> <li>● Volt</li> <li>● current</li> <li>● power</li> <li>● speed</li> <li>● frequency</li> <li>● oil pressure</li> <li>● oil temp</li> <li>● power factor</li> <li>● running time</li> <li>● water temp</li> <li>● battery voltage</li> </ul>	

**Option**

**Generator Set**

- Trailer generator set
- ABB MCCB circuit breaker
- 50°C Radiator

**Fuel system**

- 12 hours base fuel tank
- 24 hours base fuel tank
- Dual wall base fuel tank
- External fuel tank

**Exhaust system**

- Residential exhaust silencer

**Alternator**

- PMG excitation
- Anti Condensation Heater

**For cold area**

- Water heater
- Oil heater
- Rapid water preheater (diesel burner)

**Auto system**

- Remote Control panel
- ATS control cabinet
- Paralleling System

External ATS



220V water heater



Diesel powered heater



220V Oil heater Syn. Cabinet



Parker separator



TANON POWER reserves the right to change the specifications and design without notice.